

The right way to attach almost anything to metal roofs!

S-5![®]

The Right Way!

TopFix CorruBracket-AU[™]

TopFix CorruBracket-AU[™] is designed specifically for the Australian, Asian, and African markets and is compatible with 16–18 mm corrugated roofing profiles. TopFix CorruBracket-AU is affixed to the crest of the corrugation, leaving the drainage plane free of holes to protect against leaks. For medium-duty applications, the bracket can be attached directly to the sheeting, accommodating ancillary attachment anywhere along the corrugation. For heavy-duty applications, the bracket can be fixed into the underlying substrate for additional support without crushing the corrugation.




Having no messy sealants to apply, TopFix CorruBracket-AU comes with a factory-applied EPDM rubber gasket seal already on the base, and the S-5![®] patented reservoir conceals the EPDM from UV exposure, preventing UV degradation.

Installation is simple! TopFix CorruBracket-AU is mounted directly into the crest of the corrugation, straddling the valley. No surface preparation is necessary; simply wipe away excess oil and debris, align, and apply. Secure directly into the crest of the corrugation by driving the appropriate screws into the six pre-punched holes, or pre-drilling the proper sized hole through the six pre-punched holes and riveting.

TopFix CorruBracket-AU[™] Mini

The TopFix CorruBracket-AU Mini is a bit shorter than its standard counterpart and has two pre-punched holes in its base rather than six. The mini is the choice for attaching all kinds of rooftop accessories: signs, walkways, satellite dishes, antennas, rooftop lighting, lightning protection systems, solar arrays, exhaust stack bracing, conduit, condensate lines, mechanical equipment—just about anything!*

*S-5! mini brackets are not compatible with, and should not be used with, S-5! SnoRail[™]/SnoFence[™] or ColorGard[®] snow retention systems.

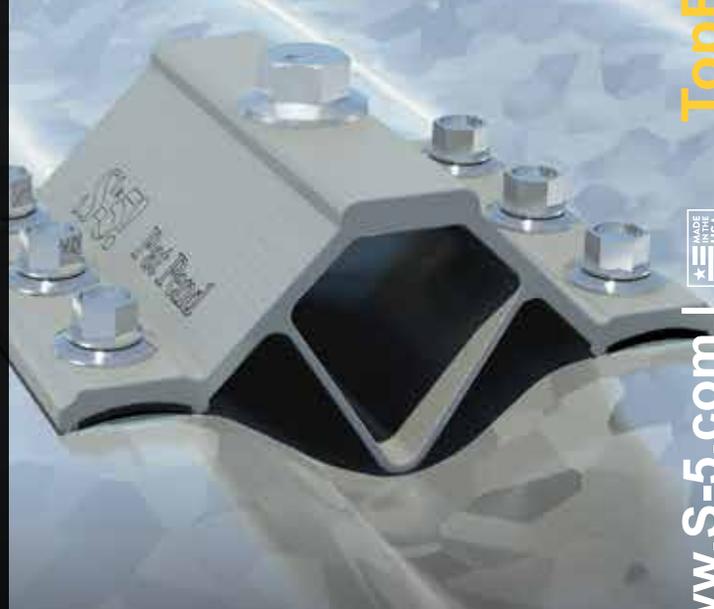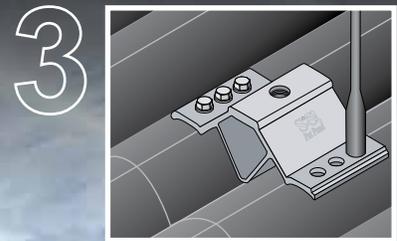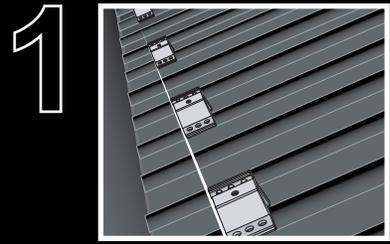

S-5![®] TopFix CorruBracket-AU[™] is the right way to attach almost anything to 16–18mm corrugated roofing, including PV via rail or DirectAttached[™] methods.

TopFix CorruBracket-AU[™] (and Mini)




888-825-3432 | www.S-5.com



TopFix CorruBracket-AU™ can be used for almost any attachment need on 16–18 mm corrugated metal roofing.

The **TopFix CorruBracket-AU™** and **TopFix CorruBracket-AU™ Mini** each come with factory-applied EPDM rubber gaskets on the base. A structural aluminum attachment bracket, TopFix CorruBracket-AU is compatible with most common metal roofing materials. For design assistance, ask your distributor, or visit www.S-5.com for the independent lab test data that can be used for load-critical designs and applications. Also, please visit our website for more information including CAD details, metallurgical compatibilities, and specifications. S-5!® holding strength is unmatched in the industry.


Example Profile

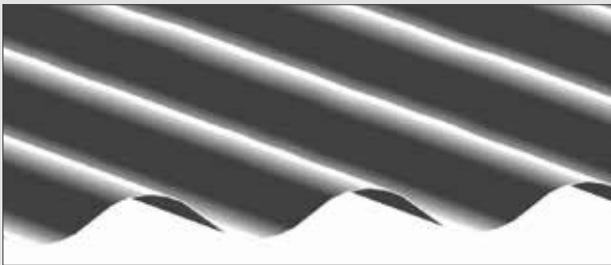


Example Applications

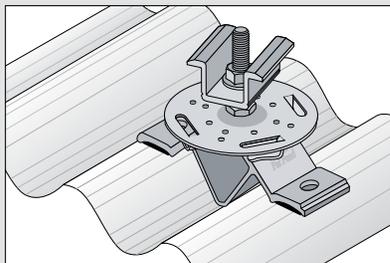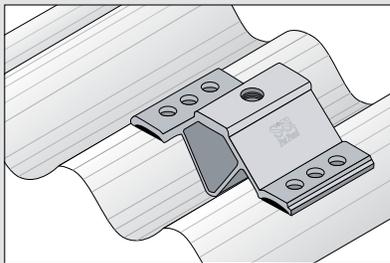

TopFix CorruBracket-AU™

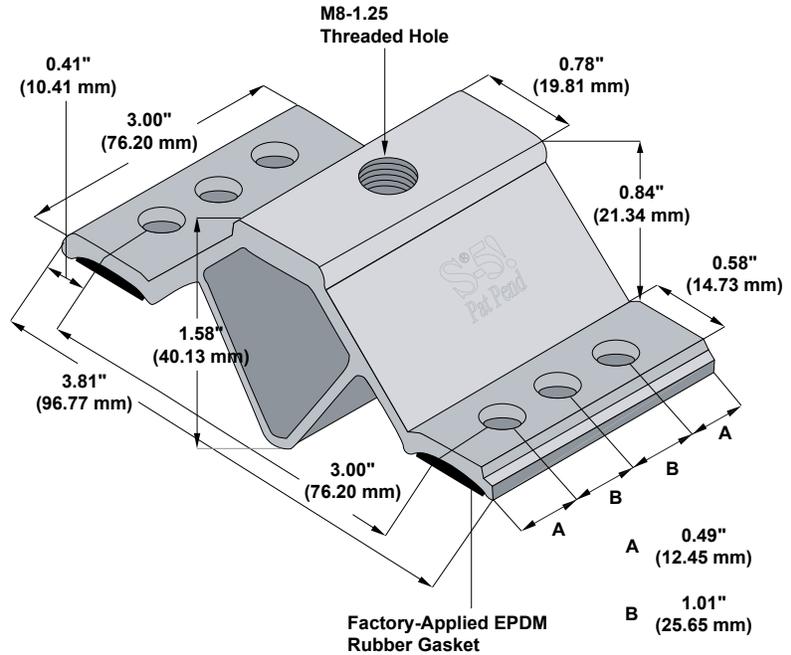

TopFix CorruBracket-AU™ Mini

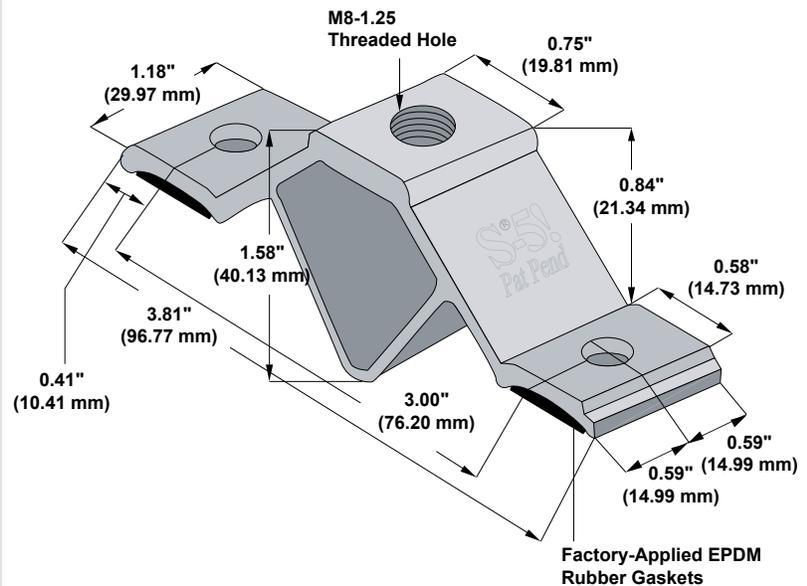

Please note: All measurements are rounded to the second decimal place. Contact your distributor for information about hardware requirements.

S-5!® Warning! Please use this product responsibly!

Products are protected by multiple U.S. and foreign patents. For published data regarding holding strength, bolt torque, patents, and trademarks, visit the S-5! website at www.S-5.com.

Copyright 2015, Metal Roof Innovations, Ltd. S-5! products are patent protected. S-5! aggressively protects its patents, trademarks, and copyrights. Version 052115.

Distributed by